


INSTRUCTIONS FOR USE QUARTZ CHRONOGRAPH MOVEMENT

RONDA 12 ½ 5040-D

MICHEL
HERBELIN

ATELIER D'HORLOGERIE FRANÇAISE

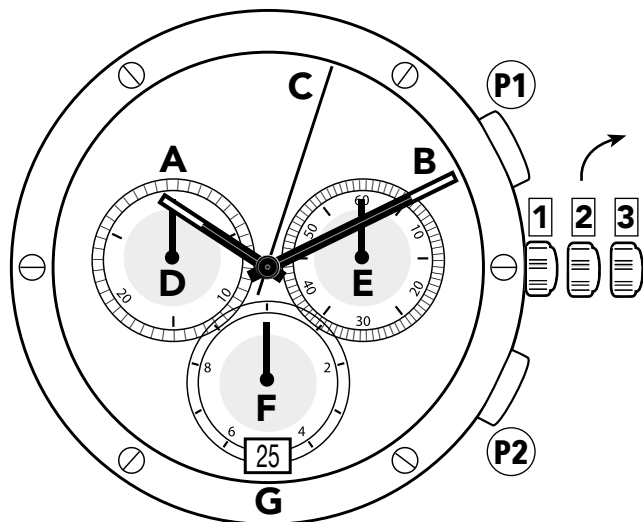

HANDS

- A. Hour hand
- B. Minute hand
- C. Seconds counter
- D. Minutes counter
- E. Seconds counter
- F. 1/10th of a second counter (hour counter after 30 minutes)
- G. Date

SETTING THE TIME

1. Pull the crown to position 3 (the seconds hand will stop)
2. Turn the crown until the correct time is displayed
3. Push the crown back into position 1

RAPID DATE CORRECTION

1. Pull the crown to position 2
2. Turn it until the correct date appears
3. Push the crown back into position 1

SETTING THE DATE AND TIME

Example :

- Date/time displayed on the watch: 25 / 10:10 AM
- Current date/time: 4 / 08:35 PM

1. Pull the crown to position 2 (the watch will continue to run).
2. Turn the crown in a counterclockwise direction until the day before the current date appears 3
3. Pull the crown to position 3 (the seconds hand will stop).
4. Turn the crown until the correct date 4 appears.
5. Continue turning the crown until the current time, 8:35 PM is displayed.
6. Push the crown back into position 1
7. Continue turning the crown until the current time, 8:35 PM is displayed.
8. Push the crown back into position 1

CHRONOGRAPH, BASIC FUNCTIONS

1. **Start:** press push-piece P1
2. **Stop:** to stop timing, press push-piece P1 again and read the chronograph counters (D, C and F)
3. **Reset:** press push-piece P2 (the chronograph hands return to zero.)

CHRONOGRAPH, TIMING WITH TOTALIZATION

- P1. - **Start:** 1st push
- **Stop :** 2nd push
- A 3rd push restarts the stopwatch
- The 4th push stops it, etc.
- P2. **Resetting the stopwatch**

CHRONOGRAPH, TIMING INTERMEDIARY TIMES

- P1. **Starts** the stopwatch
- P2. 1st intermediary time
- P2. To recover the time elapsed during reading and continue timing
- P2. 2nd intermediary time, etc.
- P1. **Stop**
- P2. **Reset**

ADJUSTING THE HANDS AND THE CHRONOGRAPH IN POSITION 0

Crown in position 3: press P1 and P2 simultaneously for 3 seconds

- P1*: Resets the seconds at the center
- P2. Changes the hand
- P1*: To change the 10th of a second (counter at 6 o'clock)
- P2. Changes the hand
- P1*: To change the minutes (counter at 9 o'clock)
- 1. Normal position